

## 94050 Polyvinyl Chloride Conservation Vent

The Shand & Jurs PVC Conservation Vents are designed for highly corrosive service where toxic liquids are stored. They are an excellent alternative to coated metal construction, where frequent corrosion due to the presence of pinholes is a problem. PVC vents are intended to provide pressure and/or vacuum relief on atmospheric storage tanks requiring normal venting.

This vent functions in the same manner as standard metal construction pressure/vacuum vents, preventing excessive product evaporation losses due to normal tank breathing. Controlling emissions of toxic and corrosive vapors to the atmosphere is a beneficial consideration.

Available in various venting configurations: pressure only, pressure/ vacuum or vacuum only, with choice of end-of-line or pipeaway styles.

Vent construction is polyvinyl chloride throughout with flat face flanges to match standard ANSI 125/150 lb. flanges. Other flange types available upon request.

Diaphragms are cushion seated and are constructed of FEP teflon for reliability and extended service life. Vent design utilizes both peripherally and stem guided pallets for dependable operation.



### Features

- Designed for highly corrosive service
- Excellent alternative to coated metal construction
- Provides pressure and/or vacuum relief
- Normal tank breathing prevents excessive product losses
- Controls emissions of toxic and corrosive vapors to the atmosphere
- Sizes 2" to 12" available

# 94050

## Polyvinyl Chloride Conservation Vent

# SHAND & JUR'S

### Specifications:

**Sizes:**  
2" - 12"

**Temperature Range**  
-20°F to +140°F

**Maximum Pressure\*:**  
8 oz./in.<sup>2</sup>

**Minimum Pressure:**  
1/2 oz./in.<sup>2</sup>

**Maximum Vacuum\*:**  
4 oz./in.<sup>2</sup>

**Minimum Vacuum:**  
1/2 oz./in.<sup>2</sup>

\*Consult factory for higher settings. Dimension Drawing for 2" shown. Consult factory for other size dimensions.

### Materials of Construction:

**Body:**  
PVC

**Diaphragm:**  
FEP Teflon Film \*\*

**Cover:**  
PVC

**Screen:**  
Polyethylene \*\*

**Seat:**  
PVC

**Load Weights:**  
Rubber-Coated Lead or 316 SS


**Pallet:**  
PVC

**Cover Gasket:**  
BUNA-N \*\*

\*\* Other materials available upon request.

### Open Vent:

2" Size Shown

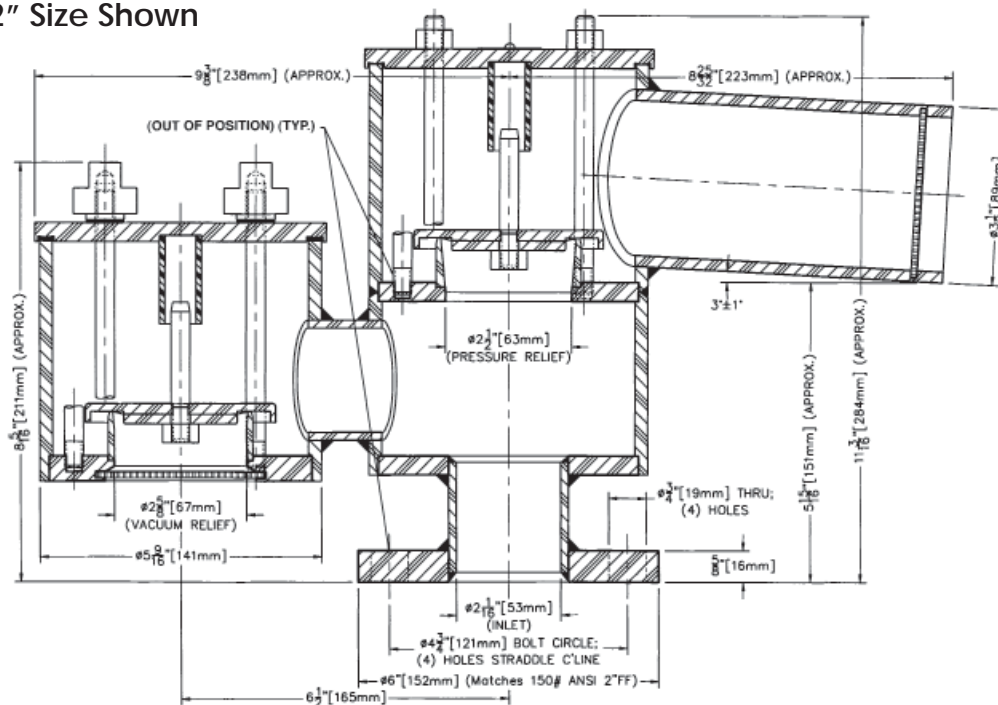

All designs subject to change. Certified dimensions and specifications available upon request.

# SHAND & JUR'S

5911 Butterfield Road Hillside, IL 60162 • tel: (708) 236-6000 • fax: (708) 236-6006  
sales@ljtechnologies.com • www.ljtechnologies.com • ISO 9001: 2008 Certified

Rev: 94050-3A

## 94050 Ordering Guide

### Model Number Selection

The model number will consist of a base number **94050** followed by 6 digit numbers. These digits will represent 3 sets of option tables.

**94050 - AB - CD - EF**

### Ordering Information

Specify:

1. Model 94050 Polyvinyl Chloride Conservation Vent
2. Size
3. Pressure and Vacuum Setting

**NOTE:** For Standard Closed Vent Models, outlet size is one size larger than inlet size (2" X 3", etc.). Same size inlet and outlet models available. Pressure flow capacity is less than standard closed vent models.



**Table AB - Size & Material**

Option AB	Size	Body Material
02	2"	PVC
03	3"	PVC
04	4"	PVC
06	6"	PVC
08	8"	PVC
10	10"	PVC
12	12"	PVC

**Table CD - Vent Type**

Option CD	Vent Type
01	Open, Pressure & Vacuum
02	Closed, Pressure & Vacuum, Outlet > Inlet
03	Open, Vacuum Only
04	Open, Pressure Only
05	Closed, Pressure & Vacuum, Outlet = Inlet
06	Closed, Pressure Only, Outlet = Inlet
07	Closed, Pressure Only, Outlet > Inlet

**Table EF - Pressure Range & Seal Type**

Option EF	Description	Material
01	Standard Setting	Lead
02	Over 2.9 oz./in. <sup>2</sup>	Lead
03	Standard to 2.9 oz./in. <sup>2</sup>	Lead
04	Standard Setting	316 Stainless Steel
05	Over 2.9 oz./in. <sup>2</sup>	316 Stainless Steel
06	Standard to 2.9 oz./in. <sup>2</sup>	316 Stainless Steel